


WT PROPRIETARY RELEASE  
 SUBJECT TO CHANGE

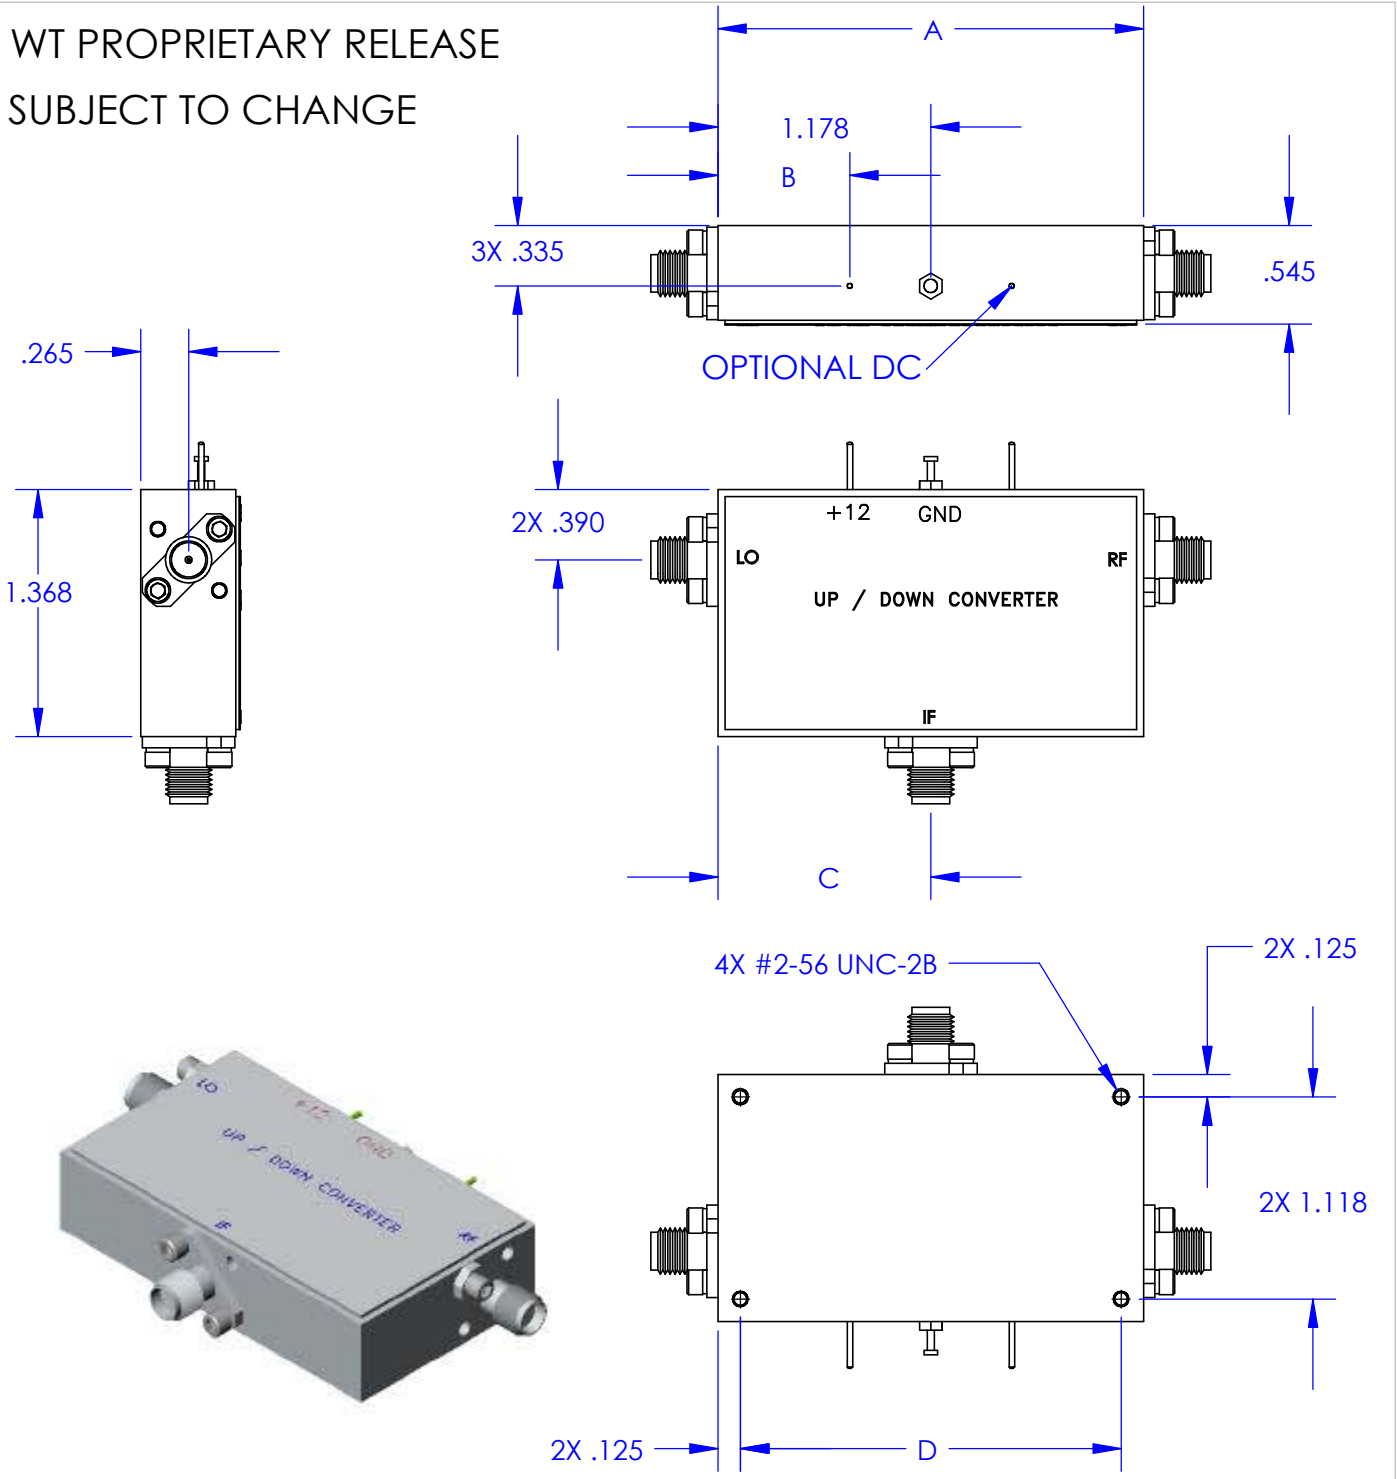

TYPE	A	B	C	D
6	1.956	.530	.978	1.706
7	2.110	.755	1.155	1.910
8	2.356	.730	1.178	2.106

COAX CONNECTOR OPTIONS:  
 SMA, 2.9mm, 2.4mm, 4 Hole K Connectors

DRAWING NOTES:  
 UNLESS OTHERWISE SPECIFIED  
 1) ALL DIMENSION TOLERANCES  
 ±.010 AFTER PLATING  
 2) RF CONNECTORS ARE K FEMALE  
 3) INTERPRET DRAWING PER ASME Y14.5M-1994

**WRIGHT TECHNOLOGIES, Inc.**

INSTALLATION DRAWING  
 WT PCK, PCV SERIES