



Wright Technologies Inc.

Broadband Frequency Operation

TECHNICAL DATA SHEET

RoHS COMPLIANT

ASG18-B2015
0020

FEATURES

- | | |
|---|--|
| <ul style="list-style-type: none"> * 2-18 GHz Frequency Operation * P-1dB: +15 dBm minimum * Small Signal Gain: 20-30 dB minimum * Gain Flatness: +/- 1.75 dB full band * High Output IP3: 20 dBm typ. * Noise Figure: 3.5 dB maximum | <ul style="list-style-type: none"> * 50 Ohm Input and Output Matched * -20 to +75 °C Operating Temperature * Unconditionally Stable * Single DC Bias Supply * Built-in DC Voltage regulation * Small Size and Weight, Yet Robust |
|---|--|

APPLICATIONS

- | | | |
|---|---|---|
| <ul style="list-style-type: none"> Laboratory Applications R&D Lab Use Radar Systems Electronic Warfare Telecom Infrastructure | <ul style="list-style-type: none"> Test Instrumentation Military and Space Communications Systems Satellite Communications Wireless Communications | <ul style="list-style-type: none"> Microwave Radio Systems Power Amplifier General Purpose Amplifier RF Front Ends Fiber Optic Interface |
|---|---|---|

Freq. In GHz	Gain dB	P-1 dBm	Input VSWR	Output VSWR	Noise dB
2.00	26.3	18.3	1.15	1.14	1.4
6.00	24.9	17.8	1.09	1.03	1.7
10.00	25.9	17.5	1.31	1.27	2.1
14.00	25.3	17.1	1.33	1.10	2.5
18.00	25.5	17.0	1.75	1.11	3.4
Min	24.7	16.8	---	---	---
Max	26.3	---	2.00	1.41	3.4
Spec.	20.0-30.0	15.0 Min	2.20 Max	2.20 Max	3.5 Max

$$\text{Bias @ +12.0 V, } I_T = \frac{150}{200} \text{ mA} \text{ mA TYP}$$

All Measurements Taken at 25°C Ambient Room

Wright Technologies Inc.
1352 Blue Oaks Blvd Suite 140
Roseville, CA 95678

Contact Us

Phone: (916) 773-4424
 Fax: (916) 760-2770
 E-mail: sales@wrighttec.com



Wright Technologies Inc.


Broadband Frequency Operation

DATA PLOTS


RoHS COMPLIANT

ASG18-B2015
0020

Gain

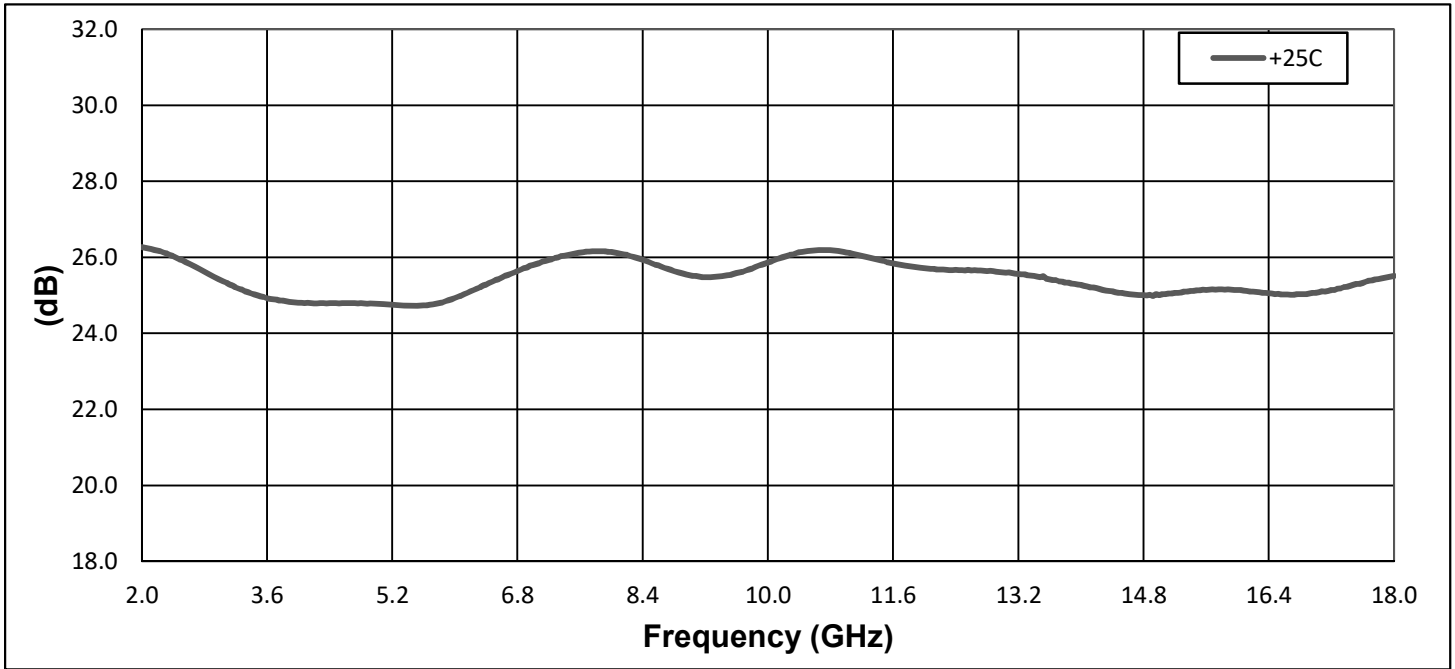

Power dBm

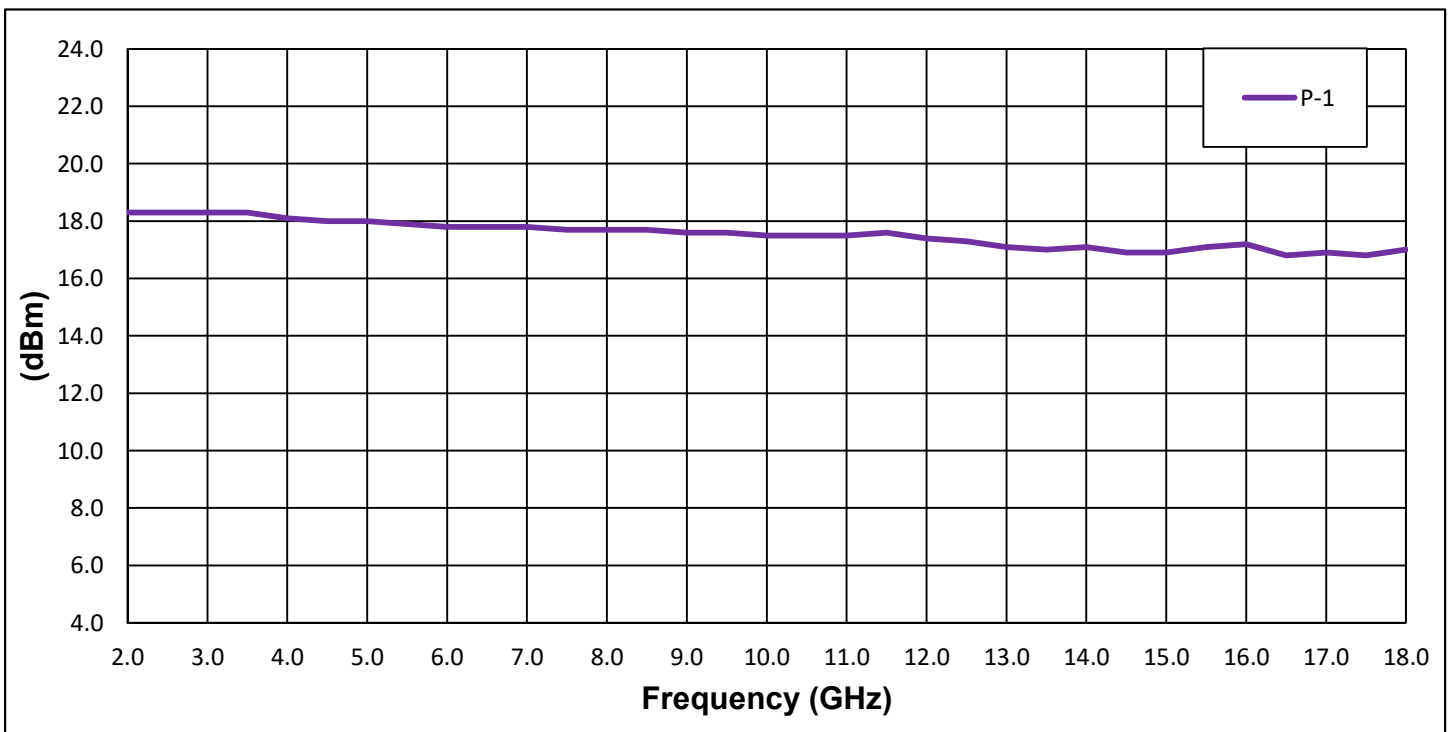



Wright Technologies Inc.


Broadband Frequency Operation

DATA PLOTS

RoHS COMPLIANT

ASG18-B2015
0020

Return Loss

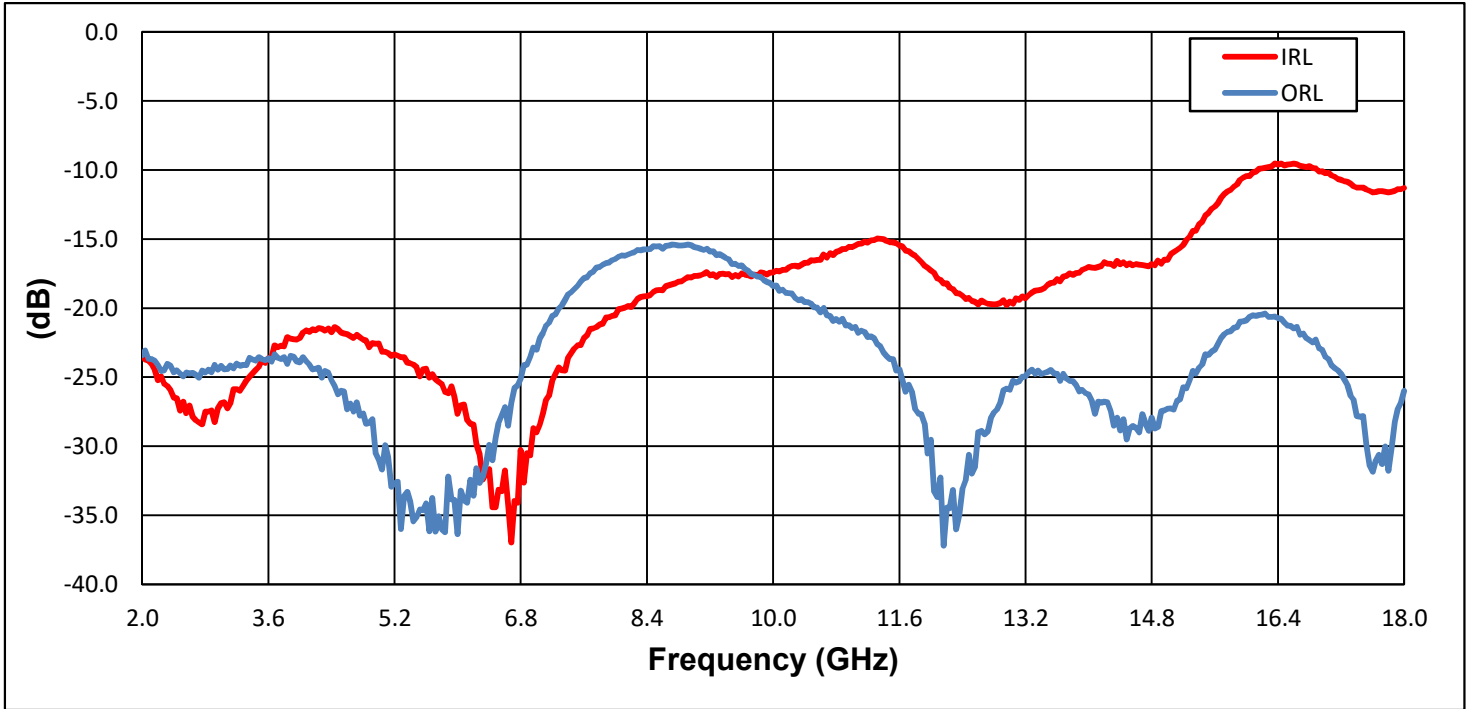

Noise (2-18.0 GHz)

