
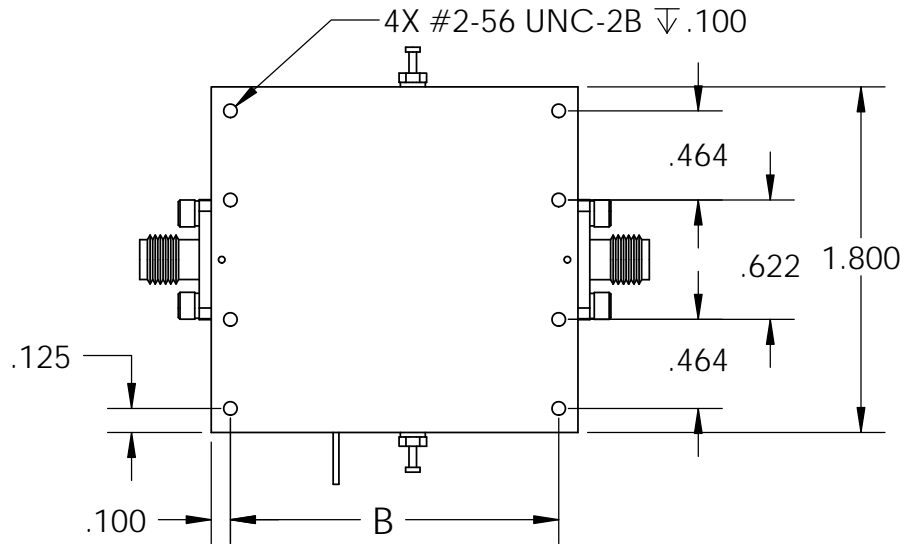


RF INPUT

RF OUTPUT

LABEL AREA (TOP)

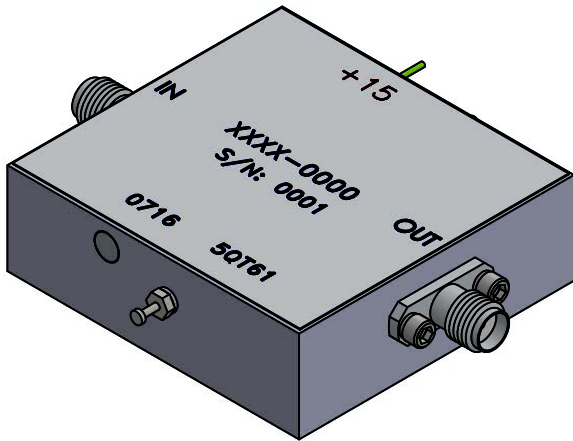

COAX CONNECTOR OPTIONS:  
SMA, 2.9mm, 2.4mm

WAVEGUIDE OPTION AVAILABLE  
UPON CUSTOMER REQUEST

APPLICATION NOTES:

- 1) ALL DIMENSION TOLERANCES  $\pm .010$  AFTER PLATING
- 2) RF CONNECTORS ARE K FEMALE
- 3) INTERPRET DRAWING PER ASME Y14.5M-1994

TYPE	A	B	C	D
3	1.710	1.510	.805	.350
4	1.910	1.710	1.050	.650
6	2.110	1.910	1.250	.750

Wright Technologies Inc.

TITLE

PKD-R14 SERIES