



Wright Technologies Inc.

Broadband Frequency Operation

TECHNICAL DATA SHEET

RoHS COMPLIANT

ATL40-B3515
0028

FEATURES

- | | |
|---|--|
| <ul style="list-style-type: none"> * 18-40 Ghz Frequency Operation * P-1dB: +15 dBm typical * Small Signal Gain: 35-45 dB minimum * Gain Flatness: +/- 2.5 dB full band * High Output IP3: 25 dBm typ. * Noise Figure: 5.0 dB maximum | <ul style="list-style-type: none"> * 50 Ohm Input and Output Matched * -40 to +75 °C Operating Temperature * Unconditionally Stable * Single DC Bias Supply * Built-in DC Voltage regulation * Small Size and Weight, Yet Robust |
|---|--|

APPLICATIONS

- | | | |
|---|---|---|
| Laboratory Applications
R&D Lab Use
Radar Systems
Electronic Warfare
Telecom Infrastructure | Test Instrumentation
Military and Space
Communications Systems
Satellite Communications
Wireless Communications | Microwave Radio Systems
Power Amplifier
General Purpose Amplifier
RF Front Ends
Fiber Optic Interface |
|---|---|---|

Freq. In GHz	Gain dB	P-1 dBm	Input VSWR	Output VSWR	Noise dB
18.0	38.2	16.6	1.70	2.35	4.9
23.5	40.7	14.5	1.13	1.83	3.0
29.0	36.8	14.7	1.39	1.69	3.3
34.5	39.6	15.1	1.63	1.52	3.4
40.0	37.6	14.7	1.84	1.45	4.2
Min.	36.8	14.3	---	---	---
Max.	41.6	---	2.06	2.46	4.9
Spec.	35 MIN	15 TYP	2.50 MAX	2.50 MAX	5.0 MAX

$$\text{Bias @ +12.0 V, IT} = \frac{385}{375} \text{ mA} \quad \text{mA TYP}$$

All Measurements Taken at 25°C Ambient Room

Wright Technologies Inc.
 1352 Blue Oaks Blvd Suite 140
 Roseville, CA 95678

Contact Us
 Phone: (916) 773-4424
 Fax: (916) 760-2770
 E-mail: sales@wrighttec.com



Wright Technologies Inc.


Broadband Frequency Operation

DATA PLOTS


RoHS COMPLIANT

ATL40-B3515
0028

Gain

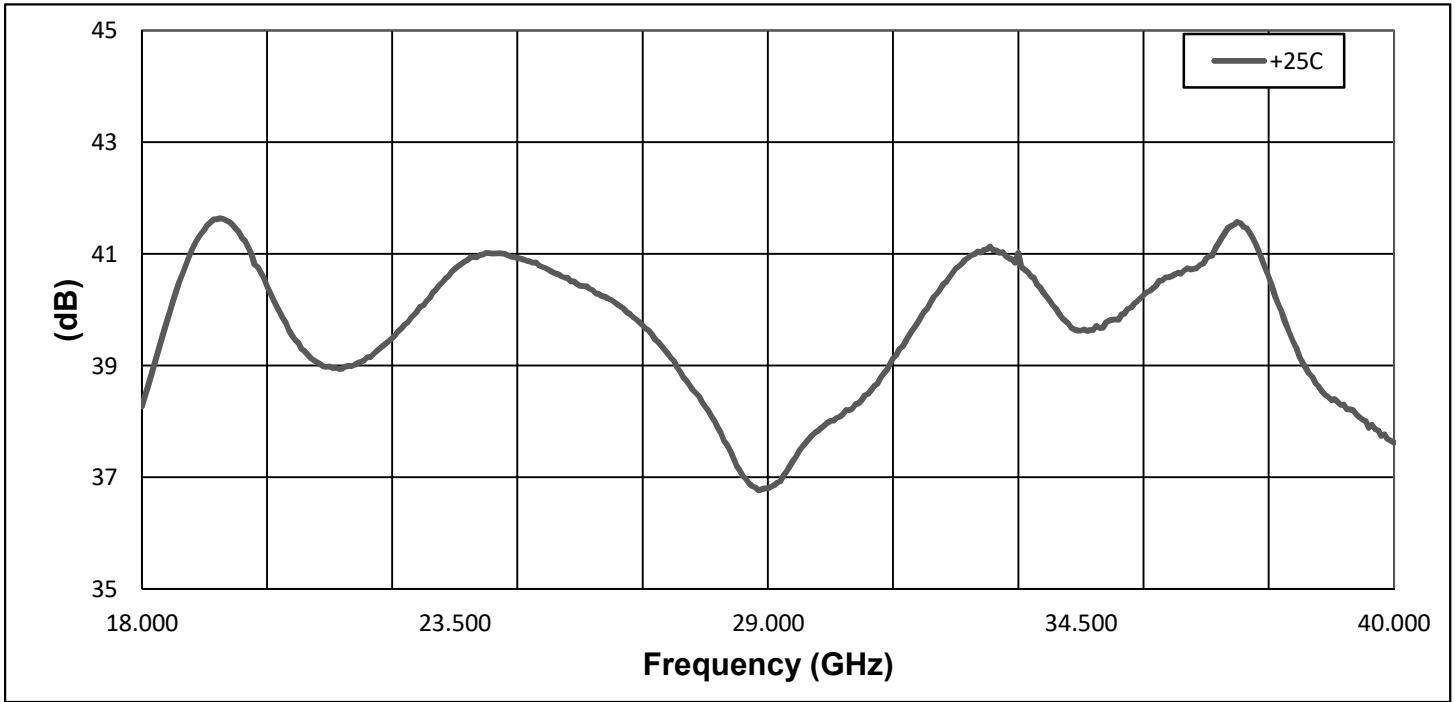

Power dBm

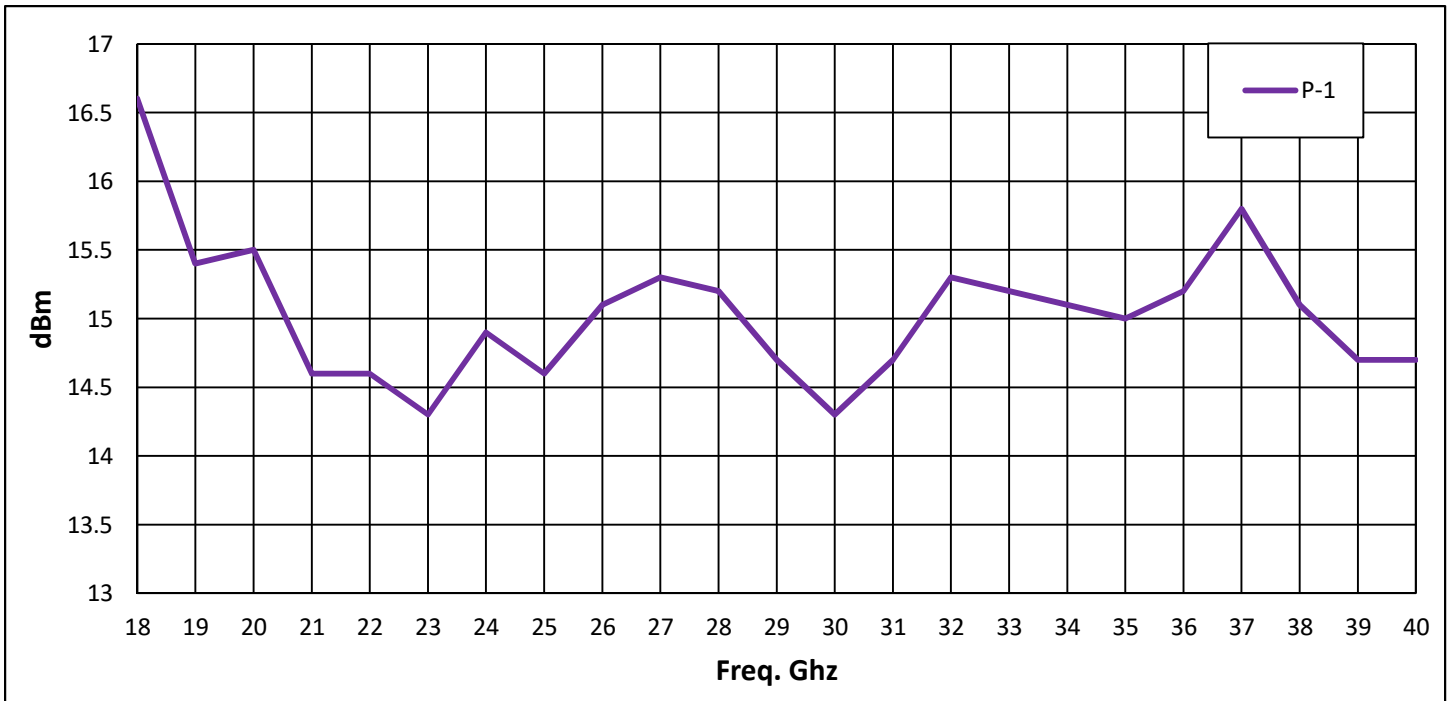



Wright Technologies Inc.


Broadband Frequency Operation

DATA PLOTS

RoHS COMPLIANT

ATL40-B3515
0028

Return Loss

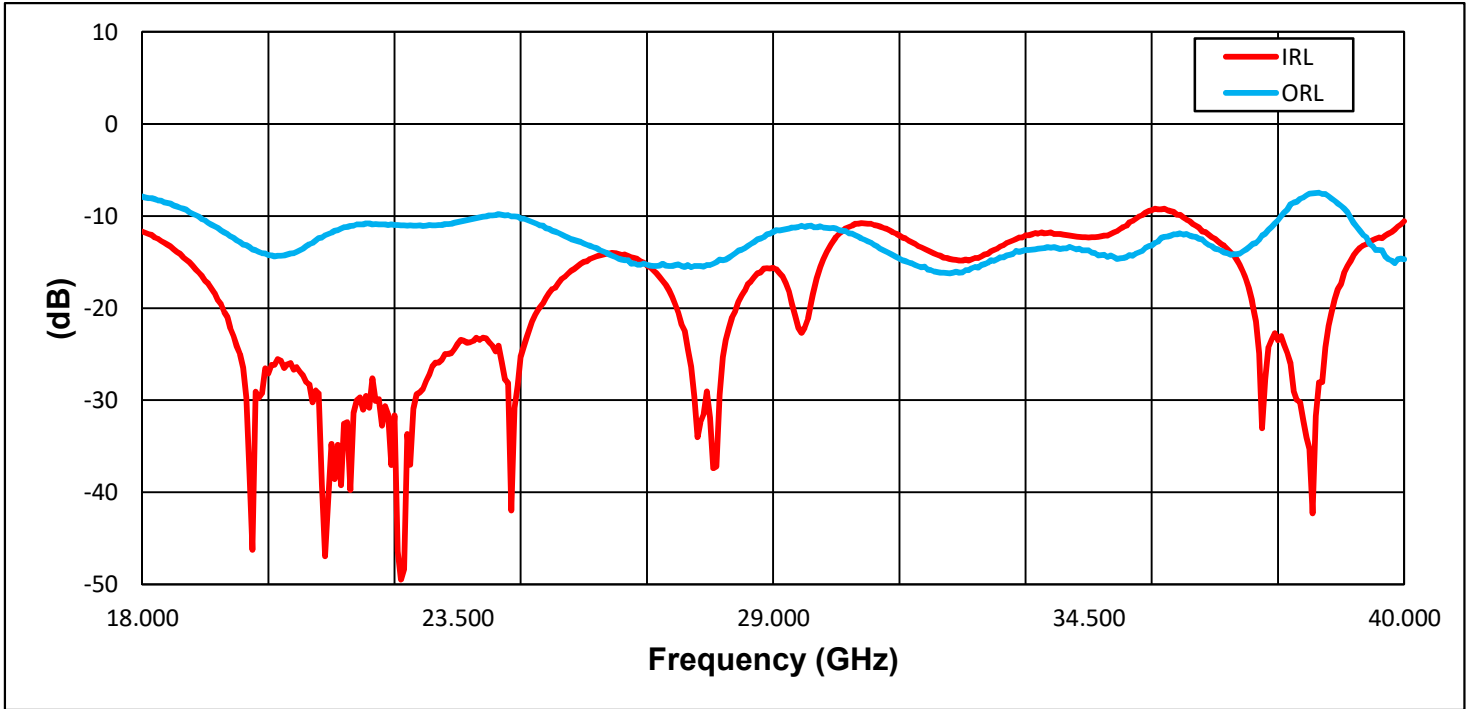

Noise (18-40.0 GHz)

